COLONIA DE LA COLONIA DE LA C

			- '	
IOBILITY / F	RANGE			
DIUM RANGE	LONG			
30 m/ 98.4 ft	Up to 10			
READING R	ANGE			
DISTANCE	LONG	AUTO RANGE		

Representing the value line, this 1D imager provides rugged durability at an regided durability at an

POWERSCAN™ 7100

PD7100



PD8300



POWERSCAN™ 8300

PBT8300



PM8300



INDUSTRIAL HANDHELD READERS

PD9500

POWERSCAN™ 9500

PBT9500



PM9500



PD9500-DPM



POWERSCAN™ DPM

PBT9500-DPM



PM9500-DPM


The PowerScan DPM readers are rugged handheld area imagers specifically addressed and capable of reading codes marked with DPM (Direct Part Marking). Includes Datalogic's Motionix™ motion-sensing and 3GL™ (Three Green Lights)

	✓ = Recomr	mended Products	affordable price.	good-read feedback.							Includes Datalogics Motionix" motion-sensing and 36L" (Three Green Lights) technologies.			
HEREST STATE		Technology	Linear Imager	Laser	Laser	Laser	Area Imager	Area Imager	Area Imager	Area Imager	Area Imager	Area Imager		
		Mobility / Range* (see chart at top)	Corded	Corded	*Bluetooth / Long	*STAR / Medium	Corded	*Bluetooth / Long	*STAR2.0 / Medium / Long	Corded	*Bluetooth / Long	*STAR2.0 / Medium / Long		
	PRODUCT HIGHLIGHTS	Distinctive Features	Excellent reading performance for high speed applications Wide scan angle and superior depth of field in the same model Optional aiming system	Choice of Standard or Auto Range optics Dual-position trigger for code aiming Wide temperature range perfect for operation in refrigerators Undecoded Laser Output model	All the same features as PD8300 Dptional display with 3 or 16-Key keypads Bluetooth 2.0 compliant Point-to-point and multipoint transmission Piconet with up to 4 devices	All the same features as PD8300 Optional display with 3 or 16-Key keypads Point-to-point, point-to multi-point and network communications Up to 255 devices Two-way communications	Fixed focus and autofocus models Snappy omnidirectional reading Intuitive aiming system Datalogic's Motionix™ motion-sensing technology 'Soft white light' illumination	All the same features as the PD9500 Bluetooth® wireless technology 3.0 compliant, Class 1 Batch Mode Up to 4 scanners can connect to the same cradle Ethernet Interfaces (Standard, Industrial)	All the same features as the PD9500 Datalogic's STAR2.0 Cordless System™ High speed 433 MHz / 910 MHz radio communications Available with optional display and 4-keys, 16-keys Ethernet Interfaces (Standard, Industrial)	Supports any kind of DPM Highly visible 4-dot aimer with center cross for targeted scanning 'Soft white light' illumination	All the same features as the PD9530-DPM Bluetooth® wireless technology 3.0, Class 1 100 m/328 ft range Cradle model with spare battery charging slot Desk and wall mount	 All the same features as the PD9530-DPM Datalogic's STAR 2.0 Cordless System™ 433 MHz and 910 MHz Point to point and point to muliti-point configuration 		
	5	Reading Range ** (see chart at top)	Long Range	Distance / Auto Range	Distance / Auto Range	Distance / Auto Range	Instinctive / Distance	Instinctive / Distance	Instinctive / Distance	Contact / Instinctive	Contact / Instinctive	Contact / Instinctive		
	QO	1D / Linear Codes	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\square}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\square}$	$\overline{\square}$	\square	$\overline{\checkmark}$	$\overline{\checkmark}$		
	Я.	2D Codes					$\overline{\square}$	$\overline{\square}$	$\overline{\square}$	$\overline{\square}$	$\overline{\checkmark}$	$\overline{\checkmark}$		
		Datalogic 'Green Spot' Technology	$\overline{\square}$	$\overline{\checkmark}$	$\overline{\square}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$			$\overline{\checkmark}$	$\overline{\checkmark}$		
		Remote Host Download					$\overline{\checkmark}$		$\overline{\mathbf{Q}}$	$\overline{\square}$	$\overline{\checkmark}$	$\overline{\checkmark}$		
		Environmental Protection	IP65	IP65	IP64 / IP65	IP64 / IP65	IP65	IP65	IP65	IP65	IP65	IP65		
		Factory Warranty	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years		
T DOOR WAS BEET		Point-of-Sale (POS)	Heavy Duty		Heavy Duty	Heavy Duty		Heavy Duty	Heavy Duty					
	(ET NS	Signature / Image Capture					Heavy Duty	Heavy Duty	Heavy Duty					
	AR. TIOI	Document Handling	Heavy Duty		Heavy Duty			Heavy Duty	Heavy Duty					
	CA.	Ticketing / Access Control			Indoor / Outdoor	Indoor / Outdoor		Heavy Duty	Heavy Duty					
	PPL	Shipping and Receiving	Heavy Duty	Heavy Duty	Heavy Duty	Heavy Duty		Heavy Duty	Heavy Duty					
	유	Asset Tracking	Heavy Duty	Heavy Duty	Heavy Duty	Heavy Duty	Heavy Duty	Heavy Duty	Heavy Duty					
		Warehouse Management	Heavy Duty	Heavy Duty	Heavy Duty	Heavy Duty		Heavy Duty	Heavy Duty					
		ID / Age Verification (US)					O	⊙	O					
1	_	Merchandise Returns			O	O								
	. K	Front Office	⊙											
	AAR ONS	Courier Services / Sorting	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	O	⊙	O					
	ED N	Patient Administration												
ы	12E	Point of Care / Bedside Bar Coding												
	A PP	Laboratory Services / Tracking								⊙	⊙	0		
	SPECIALIZED MARKET APPLICATIONS	Shop Floor / Work in Progress (WIP)	⊙	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$		
		Order Picking / Fulfillment		⊙	$\overline{\checkmark}$	$\overline{\checkmark}$	⊙	⊙	⊙					
		Forklift Operations	⊙	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$		⊙	O					

COLONIA STATE



www.datalogic.com

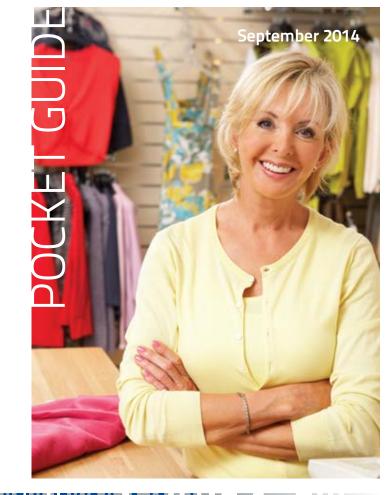



All Datalogic ADC products support GS1 DataBar™ linear codes.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Datalogic, ADC Inc. is under

© 2013-2014 Datalogic ADC, Inc. All rights reserved. Protected to the fullest extent under U.S. and international laws. Copying, or altering of this document is prohibited without express written consent from Datalogic, Inc. • Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S. and the E.U. • PowerScan and QuickScan are registered trademarks of Datalogic ADC, Inc. in many countries, including the U.S. and the E.U. • Heron is a registered trademark of Datalogic ADC, Inc. in the U.S. ■ 3GL, Datalogic Star Cordless System and Touch are trademarks of Datalogic ADC S.r.l. • Illumix, and Motionix are trademarks of Datalogic, ADC Inc. • All other brand and product names are trademarks of their respective owners.

Product specifications are subject to change without notice.

> General Purpose & Industrial Handheld Readers



STALOGIC

		100CH™	QUICKSCAN™				HERON™ GRYPHON™ 4100			GRYPHON™ 4400							
		TD1100	QW2100	QD2100	QD2300	QD2400 2D	QBT2400 2D	QM2400 2D	D1X0	GD4100	GBT4100	GM4100	GD4300	GD4400 2D	GD4400-B 2D	GBT4400 2D	GM4400 2D
SHORT RA Up tc 12 m/4 CONTACT 0-5 cm/ 0-2 in ✓ = Reco	* MOBILITY / RANGE NGE MEDIUM RANGE LONG RANGE Up to Up to 1ft 30 m/ 98.4 ft 100 m/328 ft ** READING RANGE INSTINCTIVE DISTANCE LONG RANGE AUTO RANGE 0-30 cm/ 0-100 cm/ 0-250 cm/ Up to 0-12 in 0-39 in 0-98 in 10 m/33 ft	Also Available in White An excellent value for those seeking a cost-effective solution.	Entry level scanner with snappy performance and the widest scan angle/longest scan line for selected market applications.	QD2300 laser model is the pe	erfect solution for customers v	or use in retail and office environ who prefer laser scanning technisting laser scanners to image-t	ology. The QuickScan 2400 se		Entry level readers packed with features that are perfect for large to small retail or POS applications.	1D/linear bar codes. The ex	Available in Black, White or Disinfectant-Ready Enclosures linear imagers offer fast reading treme versatility of the Datalog ive features together in a perfect dergonomics.	ic Gryphon combines many	Premium features include longer reading distances, snappy reading and a bright, well-defined scan line.	flicker effect, features a cent	Also Available in White trea imagers support virtually, er-cross aimer with four corne tutomatically switches betwee	r dots defining the reading are	Available in Black, White or Disinfectant-Ready Enclosures Lillumination, without the a. Datalogic's Motionix™
-	Technology	Linear Imager	Linear Imager	Linear Imager	Laser	Area Imager	Area Imager	Area Imager	Linear Imager	Linear Imager	Linear Imager	Linear Imager	Laser	Area Imager	Area Imager	Area Imager	Area Imager
8	Mobility / Range* (see chart at top)	Corded	Corded	Corded	Corded	Corded	Cordless	Cordless	Corded	Corded	*Bluetooth / Medium	*STAR / Medium	Corded	Corded	Corded	*Bluetooth / Medium	*STAR / Medium
r HIGHLIGHTS	Distinctive Features	Cost-effective contact readers Two width options for specific code reading Compact and innovative read-thru holder for hands-free reading Pro models are multi-interface	Wide scan angle / scan line Over mold protection Good-read 'Green Spot' Collapsible Stand	Affordable Replaceable window	Affordable Replaceable window Ergonomic - lightweight with small form factor	Affordable 2D readerOutstanding snappiness	 Bluetooth® wireless technology 3.0, Class 2 25 m / 82 ft Radio range Compatible with Android and iOS devices Reduced visual stress with 	Datalogic's STAR2.0 Cordless System™ Secure radio communications High speed 433 MHz only 25 m / 82 ft Radio range Reduced visual stress with	 Handheld and hands-free operation Stand Mode automatically switches to hands-free reading Accurate and high first- 	Superior depth-of-field Wide scan angle Excellent reading performance and label decoding High resolution code reading capability	All the same features as Model GD4100 Point-to-point and point-to-multi-point communication 2-Position cradle with Scan-While-Charging Batch Mode		Superior depth of fieldWide scan angle	Omnidirectional reading High motion tolerance User friendly illumination Highly visible 4-dot aimer	All the same features as GD4400 All-in-One integrated tilting base Handheld and presentation operation	All the same features as GD4400 2-Position cradle with Scan-While-Charging	All the same features as GD4400 2-Position cradle with Scan-While-Charging Batch Mode capability Point-to-point and point-to-multi-point communication Anti-counterfeit option (433 MHz only)
Ü	Reading Range ** (see chart at top)	Contact / Instinctive	Instinctive	Instinctive	Instinctive	Instinctive	Instinctive	Instinctive	Instinctive	Distance	Distance	Distance	Distance	Distance	Distance	Distance	Distance
O O	1D / Linear Codes	$\overline{\checkmark}$		$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$
E E	2D Codes					$\overline{\checkmark}$	$\overline{\checkmark}$								$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$
	Datalogic 'Green Spot' Technology			$\overline{\checkmark}$		$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$	$\overline{\checkmark}$
	Remote Host Download			<u> </u>		$\overline{\checkmark}$		<u> </u>		<u> </u>	$\overline{\square}$	<u> </u>	<u> </u>	<u> </u>	<u> </u>	$\overline{\checkmark}$	$\overline{\square}$
	Environmental Protection	IP30	IP42	IP42	IP42	IP42	IP42	IP42	IP30	IP52	IP52	IP52	IP52	IP52	IP52	IP52	IP52
1	Factory Warranty	5 Years	3 Years	5 Years	3 Years	5 Years	3 Years	3 Years	5 Years	5 Years	3 Years	3 Years	5 Years	5 Years	5 Years	3 Years	3 Years
Б 10	Point-of-Sale (POS)	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty
RKE	Signature / Image Capture													Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty
CATI	Document Handling	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light Duty	Light / Medium Duty		Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty
OSS PLI	Ticketing / Access Control		Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Light / Medium Duty	Indoor	Indoor	Liebt / Madison Duby	Indoor	Indoor	Indoor	Indoor
R R	Shipping and Receiving Asset Tracking		Light Duty			Light Duty	Light Duty	Light Duty				Light / Medium Duty	Light / Medium Duty Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty	Light / Medium Duty
	□ ID / Age Verification (US)					$\overline{\square}$	$\overline{\square}$			Eight / Mediani Bacy	Light / Mediani Baty	Light / Mediani Baty	Light / Mediani Baty	In the state of th	Zight / Mediani Bacy	Zight / Medidiii Buty	Zight / Median Baty
	Merchandise Returns		·		·				⊙	⊙		\square	·			✓	\square
l b	Front Office	\odot	□ □ □	\square	\square		lacksquare	\square	lacksquare		V	Į.	<u> </u>		<u> </u>		[V]
ARK NS	Courier Services / Sorting						<u> </u>	<u> </u>		V			V				
ΣO	Patient Administration	0	V			$\overline{\square}$			✓		\square	\square	\square		$\overline{\mathbf{V}}$		$\overline{\square}$
ZED ICA	Point of Care / Bedside Bar Coding									✓						✓	<u> </u>
PECIALIZED MARKET APPLICATIONS	Laboratory Services / Tracking		·	⊙		O	⊙	⊙					\square	✓		· · ·	· ·
A EC	Shop Floor / Work in Progress (WIP)									·		\square	<u> </u>		<u> </u>	$oxed{\square}$	
R P	Order Picking / Fulfillment										<u> </u>	\square			<u> </u>		<u> </u>
	Forklift Operations									·			·				
	- Sikilit Operations																

GENERAL PURPOSE HANDHELD READERS